



ELED Strip RGBW



User Instructions

©Elation Professional®
6122 S. Eastern Ave.
Los Angeles CA. 90040
www.elationlighting.com

Rev. 11/08

ELED Strip RGBW

Introduction

Unpacking: Thank you for purchasing the ELED Strip RGBW by Elation Professional®. Every ELED Strip RGBW has been thoroughly tested and has been shipped in perfect operating condition. Carefully check the shipping carton for damage that may have occurred during shipping. If the carton appears to be damaged, carefully inspect your fixture for any damage and be sure all accessories necessary to operate the unit has arrived intact. In the case damage has been found or parts are missing, please contact our toll free customer support number for further instructions. Do not return this unit to your dealer without first contacting customer support.

Introduction: The Elation Professional® ELED Strip RGBW is part of a continuing pursuit to create high quality intelligent lighting. The ELED Strip RGBW is a DMX intelligent, high powered LED color bar. This effect can be used in a stand alone mode or connected in a Master/Slave configuration. The unit can also be controlled via DMX controller. This wash has four operating modes: Sound Active mode, Static Color mode, Preset mode, RGBW mode, and DMX control mode.

Customer Support: Elation provides a customer support line, to provide set up help and to answer any question should you encounter problems during your set up or initial operation. You may also visit us on the web at www.elationlighting.com for any comments or suggestions. Service Hours are Monday through Friday 9:00 a.m. to 5:00 p.m. Pacific Standard Time.

Voice: (323) 582-3322
Fax: (323) 582-3108
E-mail: support@elationlighting.com

Warning! To prevent or reduce the risk of electrical shock or fire, do not expose this unit to rain or moisture.

Caution! There are no user serviceable parts inside this unit. Do not attempt any repairs yourself, doing so will void your manufactures warranty. In the unlikely event your unit may require service please contact Elation.

PLEASE recycle the shipping carton when ever possible.

ELED Strip RGBW

General Instructions

To optimize the performance of this product, please read these operating instructions carefully to familiarize yourself with the basic operations of this unit. These instructions contain important safety information regarding the use and maintenance of this unit. Please keep this manual with the unit, for future reference.

ELED Strip RGBW

Features

- Multicolors
- Five Operating Modes
- Electronic Dimming 0-100%
- Built in Microphone
- DMX-512 protocol
- Six DMX Modes: 4 Channel Mode, 7 Channel Mode, 8 Channel Mode, 11 Channel Mode, 16 Channel Mode, and 19 Channel Mode.
- Link Units Together via AC In/Out

ELED Strip RGBW

Warranty Registration

The ELED Strip RGBW carries a two year limited warranty. Please fill out the enclosed warranty card to validate your purchase. All returned service items whether under warranty or not, must be freight pre-paid and accompany a return authorization (R.A.) number. The R.A. number must be clearly written on the outside of the return package. A brief description of the problem as well as the R.A. number must also be written down on a piece of paper included in the shipping carton. If the unit is under warranty, you must provide a copy of your proof of purchase invoice. You may obtain a R.A. number by contacting our customer support team on our customer support number. All packages returned to the service department not displaying a R.A. number on the outside of the package will be returned to the shipper.

ELED Strip RGBW

Safety Precautions

- To reduce the risk of electrical shock or fire, do not expose this unit rain or moisture
- Do not spill water or other liquids into or on to your unit.
- Be sure that the local power outlet match that of the required voltage for your unit.
- Do not attempt to operate this unit if the power cord has been frayed or broken. Do not attempt to remove or break off the ground prong from the electrical cord. This prong is used to reduce the risk of electrical shock and fire in case of an internal short.
- Disconnect from main power before making any type of connection.
- Do not remove the cover under any conditions. There are no user serviceable parts inside.
- Never operate this unit when it's cover is removed.
- Never plug this unit in to a dimmer pack
- Always be sure to mount this unit in an area that will allow proper ventilation. Allow about 6" (15cm) between this device and a wall.
- Do not attempt to operate this unit, if it becomes damaged.
- This unit is intended for indoor use only, use of this product outdoors voids all warranties.
- During long periods of non-use, disconnect the unit's main power.
- Always mount this unit in safe and stable matter.
- Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to the point they exit from the unit.
- Cleaning -The fixture should be cleaned only as recommended by the manufacturer. See page 17 for cleaning details.
- Heat -The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
- The fixture should be serviced by qualified service personnel when:
 - A. The power-supply cord or the plug has been damaged.
 - B. Objects have fallen, or liquid has been spilled into the appliance.
 - C. The appliance has been exposed to rain or water.
 - D. The appliance does not appear to operate normally or exhibits a marked change in performance.

ELED Strip RGBW

Set Up

Power Supply: Before plugging your unit in, be sure the source voltage in your area matches the required voltage for your Elation ELED Strip RGBW. The Elation ELED Strip RGBW is a 100v ~ 220v unit. Because of voltage setup of the unit you do not have to worry about wall output voltage. This unit is compatible with all wall outputs. Check the wall outlet voltage before attempting to operate your fixture.

DMX-512: DMX is short for Digital Multiplex. This is a universal protocol used as a form of communication between intelligent fixtures and controllers. A DMX controller sends DMX data instructions from the controller to the fixture. DMX data is sent as serial data that travels from fixture to fixture via the DATA "IN" and DATA "OUT" XLR terminals located on all DMX fixtures (most controllers only have a DATA "OUT" terminal).

DMX Linking: DMX is a language allowing all makes and models of different manufactures to be linked together and operate from a single controller, as long as all fixtures and the controller are DMX compliant. To ensure proper DMX data transmission, when using several DMX fixtures try to use the shortest cable path possible. The order in which fixtures are connected in a DMX line does not influence the DMX addressing. For example; a fixture assigned a DMX address of 1 may be placed anywhere in a DMX line, at the beginning, at the end, or anywhere in the middle. When a fixture is assigned a DMX address of 1, the DMX controller knows to send DATA assigned to address 1 to that unit, no matter where it is located in the DMX chain.

Data Cable (DMX Cable) Requirements (For DMX Operation):

The ELED Strip RGBW can be controlled via DMX-512 protocol. The ELED Strip RGBW has 6 DMX modes, please see pages 10-12 for the different modes. The DMX address is set on the back panel of the ELED Strip RGBW. Your unit and your DMX controller require a standard 3-pin XLR connector for data input and data output (Figure 1). If you are making your own cables, be sure to use standard two conductor shielded cable (This cable may be purchased at almost all pro sound and lighting stores). Your cables should be made with a male and female XLR connector on either end of the cable. Also remember that DMX cable must be daisy chained and can not be split.



Figure 1

ELED Strip RGBW

Set Up

Notice: Be sure to follow figures two and three when making your own cables. Do not use the ground lug on the XLR connector. Do not connect the cable's shield conductor to the ground lug or allow the shield conductor to come in contact with the XLR's outer casing. Grounding the shield could cause a short circuit and erratic behavior.

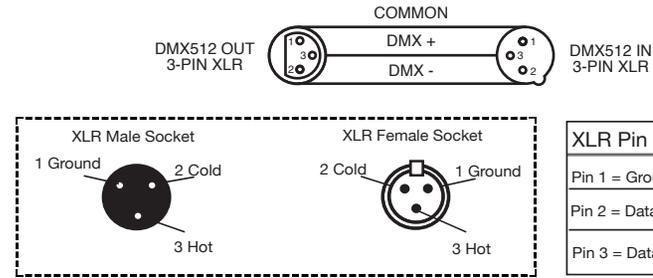


Figure 2

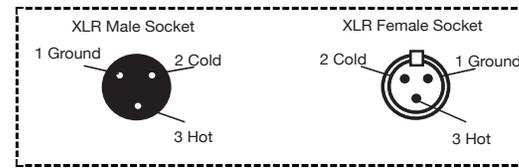


Figure 3

Special Note: Line Termination. When longer runs of cable are used, you may need to use a terminator on the last unit to avoid erratic behavior. A terminator is a 90-120 ohm 1/4 watt resistor which is connected between pins 2 and 3 of a male XLR connector (DATA + and DATA -). This unit is inserted in the female XLR connector of the last unit in your daisy chain to terminate the line. Using a cable terminator (ADJ part number Z-DMX/T) will decrease the possibilities of erratic behavior.



Termination reduces signal errors and avoids signal transmission problems and interference. It is always advisable to connect a DMX terminal, (Resistance 120 Ohm 1/4 W) between PIN 2 (DMX-) and PIN 3 (DMX +) of the last fixture.

Figure 4

5-Pin XLR DMX Connectors. Some manufactures use 5-pin XLR connectors for DATA transmission in place of 3-pin. 5-pin XLR fixtures may be implemented in a 3-pin XLR DMX line. When inserting standard 5-pin XLR connectors in to a 3-pin line a cable adaptor must be used, these adaptors are readily available at most electric stores. The chart below details a proper cable conversion.

3-Pin XLR to 5-Pin XLR Conversion		
Conductor	3-Pin XLR Female (Out)	5-Pin XLR Male (In)
Ground/Shield	Pin 1	Pin 1
Data Complement (- signal)	Pin 2	Pin 2
Data True (+ signal)	Pin 3	Pin 3
Not Used		Do Not Use
Not Used		Do Not Use

LED Display On/Off:

To set the LED display to turn off after 10 seconds, press the MODE button until 0010 is displayed, press the UP button to display 0020. Now the display will disappear after 10s. Press any button to turn the display on again. Be advised though that the display will turn off automatically after 10 seconds.

To set the display press the MODE button until 0010 is displayed. The display will now stay on at all times.

0010= LCD display on at all times.

0020= LCD display shuts off after 10 seconds.

Operating Modes:

You can use the ELED Strip RGBW in five ways:

- DMX control mode - This function will allow you to control each individual fixtures traits with a standard DMX 512 controller.
- Color mode - Select one of 32 colors to remain static
- Preset mode - There are 32 built in programs to choose from.
- RGBW mode - Control the intensity of all four colors adjusting the intensity to your desire.
- Sound-Active mode - The unit will react to sound, chasing through the built in programs.

Master-Slave Operation:

This function will allows you to link units together to run in a Master-Slave mode. In Master-Slave operation one unit will act as the controlling unit and the others will react to the controlling units built-in programs. Any unit can act as a Master or as a Slave however, only one unit can be programmed to act as the "Master."

Master-Slave Connections and Settings:

1. Daisy chain your units via the XLR connector on the rear of the unit. Use standard XLR microphone cables to link your units together. Remember that the Male XLR connector is the input and the Female XLR connector is the output. The first unit in the chain (master) will use the female XLR connector only. The last unit in the chain will use the male XLR connector only.

You can also daisy chain the power cords, this can only be done with 20 fixtures. After 20 you will need to use a new power outlet. They must be the same fixtures. DO NOT mix fixtures.

2. Set the "Master" unit to your desired mode or operation.
3. For the "Slave" unit(s), press the MODE button until the display to shows "XXX7".
4. Connect the "Slave" unit or units and they will automatically start to follow the "Master."

Color Mode:

1. Plug the fixture in and press the MODE button until "XXX8" is displayed.
2. There are 32 colors to choose from. Select your desired color by pressing the UP and DOWN buttons.

Preset Program Mode:

1. Plug the fixture in and press the MODE button until "XXX9" is displayed.
2. There are 20 programs to choose from. Select your desired program by pressing the UP and DOWN buttons. You can set your program speed by following the instructions below.

Preset Program Mode Adjustment:

1. To adjust the speed of your Preset mode program press the MODE button until "XXX□" is displayed. "XXX□" is the next mode after Preset Mode.
2. Press the UP or DOWN buttons to make the adjustmetns. Set to your desire.

RGBW Mode:

1. Plug the fixture in and press the MODE button until:
2. When XXX — is displayed you are in Red dimming mode. Press the UP and DOWN buttons to adjust intensity.
3. When XXX = is displayed you are in Green dimming mode. Press the UP and DOWN buttons to adjust intensity.
3. When XXX ≡ is displayed you are in Blue dimming mode. Press the UP and DOWN buttons to adjust intensity.
4. When XXXE is displayed you are in White dimming mode. Press the UP and DOWN buttons to adjust intensity.

Sound Active Mode:

In this mode the ELED Strip RGBW will react to sound, and chase through the different programs.

1. Plug the fixture in and press the MODE button until "XXX " is dis-

ELED Strip RGBW Operating Instructions

played. You can press the UP and DOWN buttons to pick one of the 20 preset programs to play in sound active mode. If you press the UP button until “ALL␣” is displayed the fixture will now run through each preset program in sound active mode.

Note: When “ALL␣” is displayed the fixture will rotate through all programs.

2. The fixture will now change via sound.

DMX Mode:

Operating through a DMX controller gives the user the freedom to create their own programs tailored to their own individual needs. This function also allows you to use your fixtures as spot lights. The ELED Strip RGBW has 6 DMX modes: 4 Channel mode, 7 Channel mode, 8 Channel mode, 11 Channel mode, 16 Channel mode, and a 19 Channel mode. See pages 10-16 for each modes’ DMX traits.

1. This function will allow you to control each individual fixture’s traits with a standard DMX 512 controller such as the Elation® Show Designer™ or the Elation® DMX Operator™.
2. To run your fixture in DMX mode, plug in the fixture via the XLR connections to any standard DMX controller. Select your desired DMX mode, and then press the UP or DOWN buttons to adjust the DMX address.
3. To run the 4 Channel Mode, press the MODE button until “XXX1” is displayed. This is the DMX addressing for the 4 Channel Mode.
4. To run the 7 Channel Mode, press the MODE button until “XXX2” is displayed. This is the DMX addressing for the 7 Channel Mode.
5. To run the 8 Channel Mode, press the MODE button until “XXX3” is displayed. This is the DMX addressing for the 8 Channel Mode.
6. To run the 11 Channel Mode, press the MODE button until “XXX4” is displayed. This is the DMX addressing for the 11 Channel Mode.
7. To run the 16 Channel Mode, press the MODE button until “XXX5” is displayed. This is the DMX addressing for the 16 Channel Mode.
8. To run the 19 Channel Mode, press the MODE button until “XXX6” is displayed. This is the DMX addressing for the 19 Channel Mode.
9. Please see pages 10-16 for DMX values and traits

ELED Strip RGBW 4 Channel - DMX Values & Functions

Channel	Value	Function
1	1 - 255	RED 0% - 100%
2	1 - 255	GREEN 0% - 100%
3	1 - 255	BLUE 0% - 100%
4	1 - 255	WHITE 0% - 100%

ELED Strip RGBW 7 Channel - DMX Values & Functions

Channel	Value	Function
1	1 - 255	RED 0% - 100%
2	1 - 255	GREEN 0% - 100%
3	1 - 255	BLUE 0% - 100%
4	1 - 255	WHITE 0% - 100%
5	0 1 - 7 8 - 15 16 - 23 24 - 31 32 - 39 40 - 47 48 - 55 56 - 63 64 - 71 72 - 79 80 - 87	<u>COLOR MACROS</u> OFF BASTARD AMBER MEDIUM AMBER PALE AMBER GOLD GALLO GOLD GOLDEN AMBER LIGHT RED MEDIUM RED MEDIUM PINK BROADWAY PINK FOLLIES PINK LIGHT LAVENDER

ELED Strip RGBW 7 Channel - DMX Values & Functions

Channel	Value	Function
5		<u>COLOR MACROS CONT.</u>
	88 - 95	SPECIAL LAVENDER
	96 - 103	LAVENDER
	104 - 111	INDIGO
	112 - 119	HEMSLEY BLUE
	120 - 127	TIPTON BLUE
	128 - 135	LIGHT STEEL BLUE
	136 - 143	LIGHT SKY BLUE
	144 - 151	SKY BLUE
	152 - 159	BRILLIANT BLUE
	160 - 167	LIGHT GREEN BLUE
	168 - 175	BRIGHT BLUE
	176 - 183	PRIMARY BLUE
	184 - 191	CONGO BLUE
	192 - 199	PALE YELLOW GREEN
	200 - 207	MOSS GREEN
	208 - 215	PRIMARY GREEN
	216 - 223	DOUBLE CTB
	224 - 231	FULL CTB
	232 - 239	HALF CTB
240 - 247	DARK BLUE	
248 - 255	WHITE	
6		<u>PROGRAMS</u>
	1 - 11	PROGRAM 1
	12 - 23	PROGRAM 2
	24 - 35	PROGRAM 3
	36 - 47	PROGRAM 4
	48 - 59	PROGRAM 5
	60 - 71	PROGRAM 6
	72 - 83	PROGRAM 7
	84 - 95	PROGRAM 8
	96 - 107	PROGRAM 9
	108 - 119	PROGRAM 10
120 - 131	PROGRAM 11	

ELED Strip RGBW 7 Channel - DMX Values & Functions

Channel	Value	Function
6		<u>PROGRAMS CONT.</u>
	132 - 143	PROGRAM 12
	144 - 155	PROGRAM 13
	156 - 167	PROGRAM 14
	168 - 179	PROGRAM 15
	180 - 191	PROGRAM 16
	192 - 203	PROGRAM 17
	204 - 215	PROGRAM 18
	216 - 227	PROGRAM 19
	228 - 239	PROGRAM 20
240 - 255	SOUND ACTIVE	
7	1 - 255	MAIN DIMMER 0% - 100%

ELED Strip RGBW 8 Channel - DMX Values & Functions

Channel	Value	Function
1		RED (RIGHT HALF SIDE)
	1 - 255	0% - 100%
2		GREEN (RIGHT HALF SIDE)
	1 - 255	0% - 100%
3		BLUE (RIGHT HALF SIDE)
	1 - 255	0% - 100%
4		WHITE (RIGHT HALF SIDE)
	1 - 255	0% - 100%
5		RED (LEFT HALF SIDE)
	1 - 255	0% - 100%
6		GREEN (LEFT HALF SIDE)
	1 - 255	0% - 100%
7		BLUE (LEFT HALF SIDE)
	1 - 255	0% - 100%
8		WHITE (LEFT HALF SIDE)
	1 - 255	0% - 100%

ELED Strip RGBW 11 Channel - DMX Values & Functions

Channel	Value	Function
1	1 - 255	RED (RIGHT HALF SIDE) 0% - 100%
2	1 - 255	GREEN (RIGHT HALF SIDE) 0% - 100%
3	1 - 255	BLUE (RIGHT HALF SIDE) 0% - 100%
4	1 - 255	WHITE (RIGHT HALF SIDE) 0% - 100%
5	1 - 255	RED (LEFT HALF SIDE) 0% - 100%
6	1 - 255	GREEN (LEFT HALF SIDE) 0% - 100%
7	1 - 255	BLUE (LEFT HALF SIDE) 0% - 100%
8	1 - 255	WHITE (LEFT HALF SIDE) 0% - 100%
9		PLEASE SEE DMX TRAITS AND VALUES OF CHANNEL 5 OF 7 CHANNEL MODE
10		PLEASE SEE DMX TRAITS AND VALUES OF CHANNEL 6 OF 7 CHANNEL MODE
11	1 - 255	MAIN DIMMER 0% - 100%

ELED Strip RGBW 16 Channel - DMX Values & Functions

Channel	Value	Function
1	1 - 255	RED (SECTION ONE) 0% - 100%
2	1 - 255	GREEN (SECTION ONE) 0% - 100%
3	1 - 255	BLUE (SECTION ONE) 0% - 100%
4	1 - 255	WHITE (SECTION ONE) 0% - 100%
5	1 - 255	RED (SECTION TWO) 0% - 100%
6	1 - 255	GREEN (SECTION TWO) 0% - 100%
7	1 - 255	BLUE (SECTION TWO) 0% - 100%
8	1 - 255	WHITE (SECTION TWO) 0% - 100%
9	1 - 255	RED (SECTION THREE) 0% - 100%
10	1 - 255	GREEN (SECTION THREE) 0% - 100%
11	1 - 255	BLUE (SECTION THREE) 0% - 100%
12	1 - 255	WHITE (SECTION THREE) 0% - 100%
13	1 - 255	RED (SECTION FOUR) 0% - 100%
14	1 - 255	GREEN (SECTION FOUR) 0% - 100%
15	1 - 255	BLUE (SECTION FOUR) 0% - 100%
16	1 - 255	WHITE (SECTION FOUR) 0% - 100%

Please see page 16 for a diagram of the fixture and section setup.

ELED Strip RGBW 19 Channel - DMX Values & Functions


Channel	Value	Function
1	1 - 255	RED (SECTION ONE) 0% - 100%
2	1 - 255	GREEN (SECTION ONE) 0% - 100%
3	1 - 255	BLUE (SECTION ONE) 0% - 100%
4	1 - 255	WHITE (SECTION ONE) 0% - 100%
5	1 - 255	RED (SECTION TWO) 0% - 100%
6	1 - 255	GREEN (SECTION TWO) 0% - 100%
7	1 - 255	BLUE (SECTION TWO) 0% - 100%
8	1 - 255	WHITE (SECTION TWO) 0% - 100%
9	1 - 255	RED (SECTION THREE) 0% - 100%
10	1 - 255	GREEN (SECTION THREE) 0% - 100%
11	1 - 255	BLUE (SECTION THREE) 0% - 100%
12	1 - 255	WHITE (SECTION THREE) 0% - 100%
13	1 - 255	RED (SECTION FOUR) 0% - 100%
14	1 - 255	GREEN (SECTION FOUR) 0% - 100%
15	1 - 255	BLUE (SECTION FOUR) 0% - 100%
16	1 - 255	WHITE (SECTION FOUR) 0% - 100%

ELED Strip RGBW 19 Channel - DMX Values & Functions

Channel	Value	Function
17		PLEASE SEE DMX TRAITS AND VALUES OF CHANNEL 5 OF 7 CHANNEL MODE
18		PLEASE SEE DMX TRAITS AND VALUES OF CHANNEL 6 OF 7 CHANNEL MODE
19	1 - 255	MAIN DIMMER 0% - 100%





Please see below for a diagram of the fixture and section setup.

ELED Strip RGBW Diagram

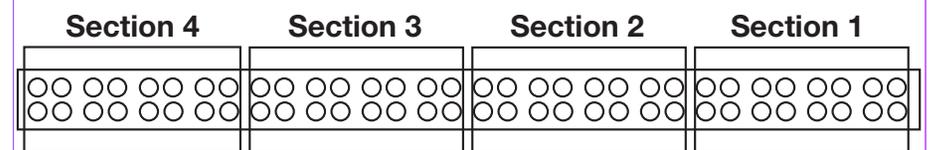

Note: The power cord is located behind Section 4.

ELED Strip RGBW Photometrics

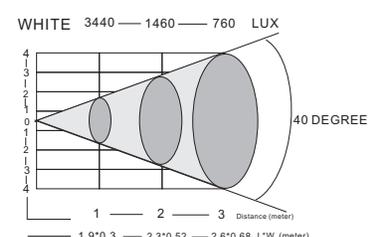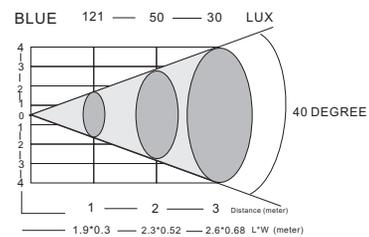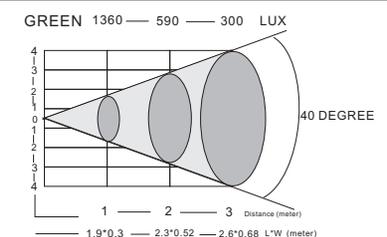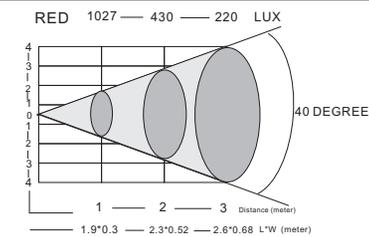

ELED Strip RGBW

Fuse Replacement

Locate and remove the unit's power cord. Once the cord has been removed locate the fuse holder located inside the power socket. Insert a flat-head screw driver into the power socket and gently pry out the fuse holder. Remove the bad fuse and replace with a new one. The fuse holder also has a holder for a spare fuse.

ELED Strip RGBW

Trouble Shooting

Listed below are a few common problems the user may encounter, with solutions.

Unit not responding to DMX:

1. Check that the DMX cables are connected properly and are wired correctly (pin 3 is "hot"; on some other DMX devices pin 2 may be 'hot'). Also, check that all cables are connected to the right connectors; it does matter which way the inputs and outputs are connected.

Unit does not respond to sound:

1. Quiet or high pitched sounds will not activate the unit.
2. Make sure that you are in Sound Active mode.

ELED Strip RGBW

Cleaning

Due to fog residue, smoke, and dust cleaning the internal and external optical lenses must be carried out periodically to optimize light output.

1. Use normal glass cleaner and a soft cloth to wipe down the outside casing.
2. Clean the external optics with glass cleaner and a soft cloth every 20 days.
3. Always be sure to dry all parts completely before plugging the unit back in.

Cleaning frequency depends on the environment in which the fixture operates (i.e. smoke, fog residue, dust, dew).

ELED Strip RGBW

Warranty

2-YEAR LIMITED WARRANTY

A. Elation Professionals® hereby warrants, to the original purchaser, Elation Professionals® products to be free of manufacturing defects in material and workmanship for a period of two years (730 days) from the date of purchase. This warranty shall be valid only if the product is purchased within the United States of America, including possessions and territories. It is the owner's responsibility to establish the date and place of purchase by acceptable evidence, at the time service is sought.

B. For warranty service, send the product only to the Elation Professionals® factory. All shipping charges must be pre-paid. If the requested repairs or service (including parts replacement) are within the terms of this warranty, Elation Professionals® will pay return shipping charges only to a designated point within the United States. If the entire instrument is sent, it must be shipped in its original package. No accessories should be shipped with the product. If any accessories are shipped with the product, Elation Professionals® shall have no liability whatsoever for loss of or damage to any such accessories, nor for the safe return thereof.

C. This warranty is void if the serial number has been altered or removed; if the product is modified in any manner which Elation Professionals® concludes, after inspection, affects the reliability of the product; if the product has been repaired or serviced by anyone other than the Elation Professionals® factory unless prior written authorization was issued to purchaser by Elation Professionals®; if the product is damaged because not properly maintained as set forth in the instruction manual.

D. This is not a service contract, and this warranty does not include maintenance, cleaning or periodic check-up. During the period specified above, Elation Professionals® will replace defective parts at its expense, and will absorb all expenses for warranty service and repair labor by reason of defects in material or workmanship. The sole responsibility of Elation Professionals® under this warranty shall be limited to the repair of the product, or replacement thereof, including parts, at the sole discretion of Elation Professionals®. All products covered by this warranty were manufactured after January 1, 1990, and bear identifying marks to that effect.

E. Elation Professionals® reserves the right to make changes in design and/or improvements upon its products without any obligation to include these changes in any products theretofore manufactured.

F. No warranty, whether expressed or implied, is given or made with respect to any accessory supplied with products described above. Except to the extent prohibited by applicable law, all implied warranties made by Elation Professionals® in connection with this product, including warranties of merchantability or fitness, are limited in duration to the warranty period set forth above. And no warranties, whether expressed or implied, including warranties of merchantability or fitness, shall apply to this product after said period has expired. The consumer's and or Dealer's sole remedy shall be such repair or replacement as is expressly provided above; and under no circumstances shall Elation Professionals® be liable for any loss or damage, direct or consequential, arising out of the use of, or inability to use, this product.

G. This warranty is the only written warranty applicable to Elation Professionals® Products and supersedes all prior warranties and written descriptions of warranty terms and conditions heretofore published.

Model: ELED Strip RGBW™SPECIFICATIONS:

Working Position:	Any safe working position
Voltage:	100V ~ 240V/47~63Hz
Power Consumption:	75W
Fuse:	3.15 Amp
Weight:	10.5 lbs./ 4.74Kgs.
Dimensions:	42.25" (L) x 7.5" (W) x 6.5" (H) 1070 x 185 x 160mm
Colors:	RGB + W Color Mixing
LEDs:	64 LED's ~ 64W LED's (16 Red, 16 Blue, 16 Green, & 16 White)
DMX Channels:	6 DMX Modes: 4 Channel Mode, 7 Channel Mode, 8 Channel Mode, 11 Channel Mode, 16 Chan- nel Mode, & 19 Channel Mode
Warranty:	2 Year (730 days)

Please Note: Specifications and improvements in the design of this unit and this manual are subject to change without any prior written notice.

©Elation Professionals®

A Division of the AmericanDJ® Group of Companies

World Headquarters:

6122 S. Eastern Ave. Los Angeles, CA 90040 USA

Tel: 323-582-3322 Fax: 323-582-3311

Web: www.elationlighting.com E-mail: info@elationlighting.com