

CODE	Length	REVISION			
		REV	DESCRIPTION	DATE	SIGNATURE
AC5PDMX15PRO	4.57mt. (15.0 ft.)		DMXCABLE	2019.6.10	


PREFAB DMX CABLE:




CABLE CONSTRUCTION:



DMX605 is a professional AES/EBU digital cable
4*0.34mm' with flexible PVC covered overall jacket -
OFC (Oxygen Free Copper)
Conductor drains mm: OFC tinned 30x0.12
Conductor insulation: LPE white+blue, 1.2mm
Nominal Impedance: 110ohm
Conductor resistance: <80ohm/Km
1st Shield: tinned copper 96*0.12 tinned wire braid+al foil
2nd shield:-
Shield resistance: 30ohm/km
Capacity inner conductor: 64pf/m
Working Temperature min/Max: -20°C/+70°C

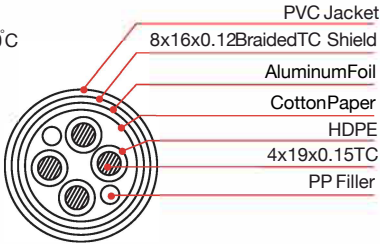

WIRING METHOD:

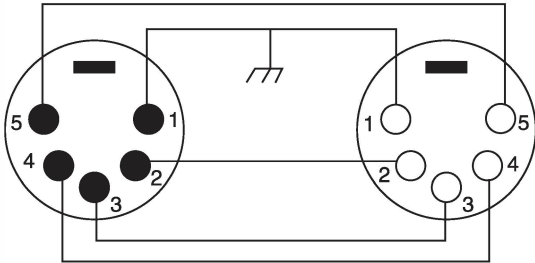

PRINTING WORD ON CABLE: