

alkalite **PZ-720**
LED DANCE FLOOR

⚠ Cautions
FOR INDOOR USE ONLY
KEEP DRY
INSTALL ONLY IN WELL-VENTILATED AREAS
DO NOT ATTEMPT TO OPEN THE CONTROLLER OR FIXTURES
NO USER SERVICEABLE PARTS INSIDE


DANGER: Ensure that main power supply is off before installing or wiring the PZ-720.



Instruction Manual

Introduction


PZ-720 LED dance floor generates millions of colors and creates a variety of lighting effect.

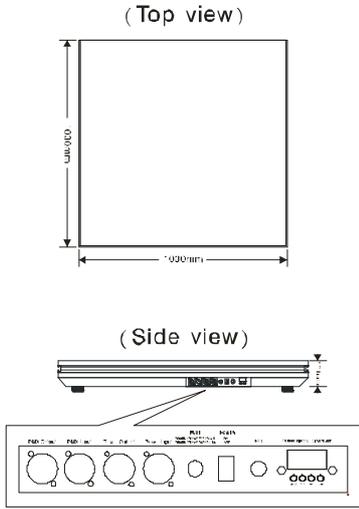

Included in package

- PZ-720 LED dance floor
- Instruction manual

DMX Mode

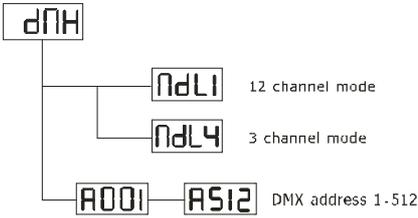

Press Mode button to find **dNH**

Step 1 - DMX channel setting :

Press F/S to begin DMX channel setting

- ndL1** 12 channel mode
- ndL4** 3 channel mode

Step 2 - DMX address setting :


Press F/S to begin, use UP or DOWN button to select DMX address.

- A001** — **A512** address 1-512

Step 3 - DMX channel function :

- Channel 1: Red (0-255)
- Channel 2: Green (0-255)
- Channel 3: Blue (0-255)

Sound Active Mode

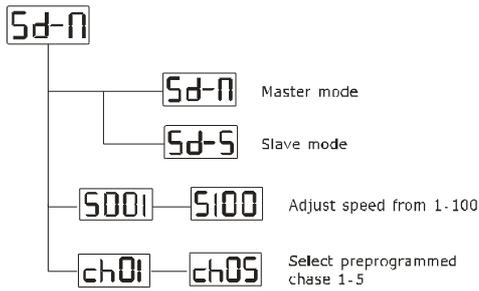

Press Mode button to find **Sd-N**

Step 1-Master Slave setting:

Press UP or DOWN button to choose Master/Slave mode

- Sd-N** Master Mode
- Sd-S** Slave Mode

Step 2-Speed adjustment:

Press F/S to adjust Speed


S001 — **S100** from 1-100

Step 3-Select Preprogram chase:

Press F/S to choose desire chase

ch01 — **ch05** Chase 1-5

Master/Slave Mode

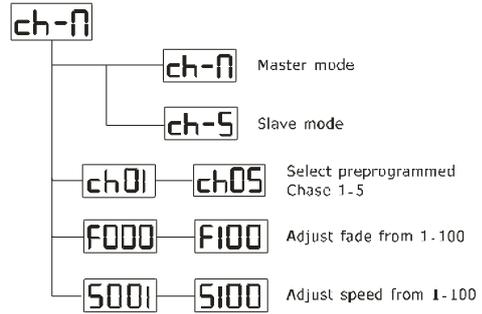

Press Mode button to find **ch-N**

Step 1-Master/Slave setting:

Press UP or DOWN button to choose Master/Slave mode

- ch-N** Master Mode
- ch-S** Slave Mode

Step 2-Select Preprogram Chase:

Press F/S to choose desire chase

ch01 — **ch05** Chase 1-5

Step 3-Fade adjustment:

Press F/s to adjust Fade

F000 — **F100** from 1-100

Step 4-Speed adjustment:

Press F/S to adjust Speed

S001 — **S100** from 1-100

Technical Specifications

PUZ-720 FIXTURE	
POWER SUPPLY:	100V <input type="checkbox"/> 230V <input type="checkbox"/> 50Hz <input type="checkbox"/> 120V <input type="checkbox"/> 240V <input type="checkbox"/> 60Hz <input type="checkbox"/> >>0V <input type="checkbox"/>
POWER CONSUMPTION:	113w
CONTROL:	DMX, BUILT-IN MIC, AUTO, MASTER/SLAVE
DIMENSIONS:	1000mm x 1000mm x 104mm
WEIGHT:	51.8KG
FUSE:	120V/T2.5A; 250V/T1.5A

Warranty

Alkalite warrants its products to be free of manufacturing defects in material and workmanship for a period of 90 days from the date of original purchase. For products properly registered under Alkalite's warranty registration program (details below), Alkalite warrants its products for a period of 1 year from the original purchase date. This warranty shall be valid only if the product is purchased from Alkalite or its authorized distributors or dealers. It is the purchaser's responsibility to establish the date and place of purchase by acceptable evidence at the time service is sought. For warranty service, send the product only to an authorized Alkalite distributor or dealer.

All warranties are void if the serial number has been altered or removed; if the product has been modified in any manner; if the product has been repaired or serviced by unauthorized personnel; or if the product is damaged due to improper use or maintenance as set forth in the instruction manual.

This is not a service contract and does not include standard maintenance or cleaning. Lamps, fuses, brushes, belts and all expendables are not covered by this warranty.

Alkalite reserves the right to change design and specifications without obligation to include these changes in previously manufactured products.

Additional warranties provided at the discretion of Alkalite distributors or dealers shall remain the sole obligation of the distributor or dealer.

alkalite
info@alkalite.com
© 2015