



Intertek Testing Services Taiwan Ltd.
5F, No. 423, Ruiguang Road, Neihu
District, Taipei 114, Taiwan
Tel.: (+886-2) 6602 2888
Fax: (+886-2) 6602 2415

Antari Lighting And Effects Ltd.
Date: April 28, 2016

Report No.: 160300600TWN-001
Page 1 of 4

Applicant: Antari Lighting And Effects Ltd.

Product: DarkFX UV Spot Light

Model: DFX-W2000

Test item: (1) Wavelength measurement
(2) Illuminance measurement

Date of Performance March 30, 2016
of Test:

Authorized by:
On Behalf of Intertek Testing Services
Taiwan Limited

Reviewer Name
Michael Chang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute Intertek's Reports and then only in their entirety, and the Client shall not use the Reports in a misleading manner. Client further agrees and understands that reliance upon the Reports is limited to the representations made therein. In the event any portion of this report becomes public, including but not limited to press releases, articles, and marketing material, without prior written consent from Intertek, Intertek will enforce the reproduction of the report in its entirety by making the full report public. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. Should Customer use an Intertek Report, in whole or in part, in such a manner as to involve Intertek in legal controversy or to adversely affect Intertek's reputation, it shall be Intertek's right to utilize any and all Customer information, including, but not limited to, data, records, instructions, notations, samples or documents within Intertek's custody and control which relate to the customer for the purpose of offering any necessary defense or rebuttal to such circumstances. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

GFT-OP-10b (12 April 2013)

Remark:

- 1) The testing results relate only to the items tested.
- 2) The test report shall not be reproduced except in full, without written approval of the laboratory.
- 3) This test report only allows to be revised within three years from its original issued date unless a further updating to the standard or requirement is noticed.
- 4) This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- 5) When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Test Method:

Measure wavelength and illuminance at distance 1m, 2m, 3m, 4m and 5m.

Test Result:

TABLE: Illuminance measurement					
Distance (m)	1	2	3	4	5
Intensity ($\mu\text{W}/\text{cm}^2$)	4184 ($\mu\text{W}/\text{cm}^2$)	1737 ($\mu\text{W}/\text{cm}^2$)	933 ($\mu\text{W}/\text{cm}^2$)	648 ($\mu\text{W}/\text{cm}^2$)	526 ($\mu\text{W}/\text{cm}^2$)
	41.84 (W/m^2)	17.37 (W/m^2)	9.33 (W/m^2)	6.48 (W/m^2)	5.26 (W/m^2)
Intensity degradation rate (compare with 1m)	0%	66.3%	83.8%	87.7%	90.9%
Supplementary information: N/A					

Spectrum:

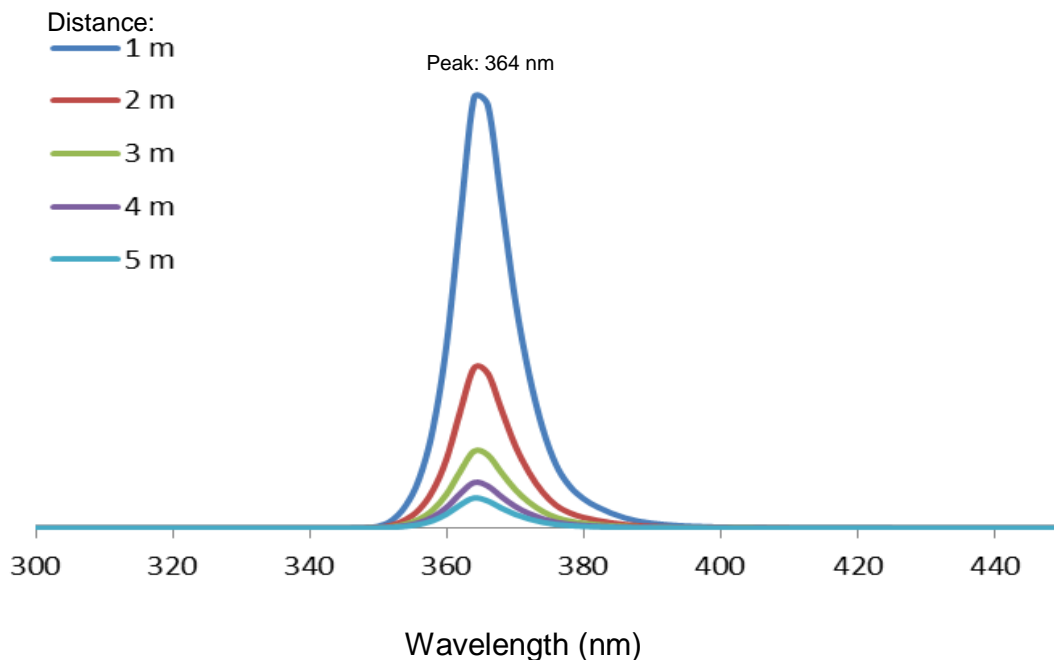


Photo:

