



USER INSTRUCTIONS

DP-DMX4B

Thank you for purchasing the DP-DMX4B by Elation Professional®. For your convenience, this DP-DMX4B has been tested and is ready to be used, there is no assembly required.

PRODUCT DESCRIPTIONS:


The DP-DMX4B is a 4 channel DMX dimmer pack, it can extend to a maximum of 512 channels using DMX-512 protocol. The DP-DMX4B features include: zero-crossing circuitry for protection of inductive loads; 3-prong Edison sockets for each channel; individual 6A fuses for each channel; XLR connection and a maximum output load of 5A per channel or 20A total.

GENERAL FUNCTIONS:

1. **Channel Output:** 5A per channel, Total 20A
2. **Channel LEDs:** These LEDs indicate the dimming, On/Off of the appropriate channels.
3. **DMX Dipswitches:** Slide these dipswitches to select desired DMX address (DMX addressing is printed on the top cover of the DP-DMX4B.)
4. **Power LED:** The LED is lit when power is on.
5. **DMX LED:** This LED begins flashing when a DMX signal is present.
6. **Power Switch:** Turns the main power on/off.
7. **Power Input:** AC 120V~60Hz, 20A max.
8. **DMX Input:** This connector accepts your DMX input signals.
9. **DMX Output:** This connector sends your DMX signal through to the next DMX device.

SPECIFICATIONS:

Power Input.....AC 120V~60Hz, 20A max.
Channel Output.....5A/CH., Total 20A
Fuse (Internal).....6A 250V 5x20mm (x4PCS)
Dimensions.....197 x 124 x 60mm
Weight.....2.6Lbs./1.2Kgs

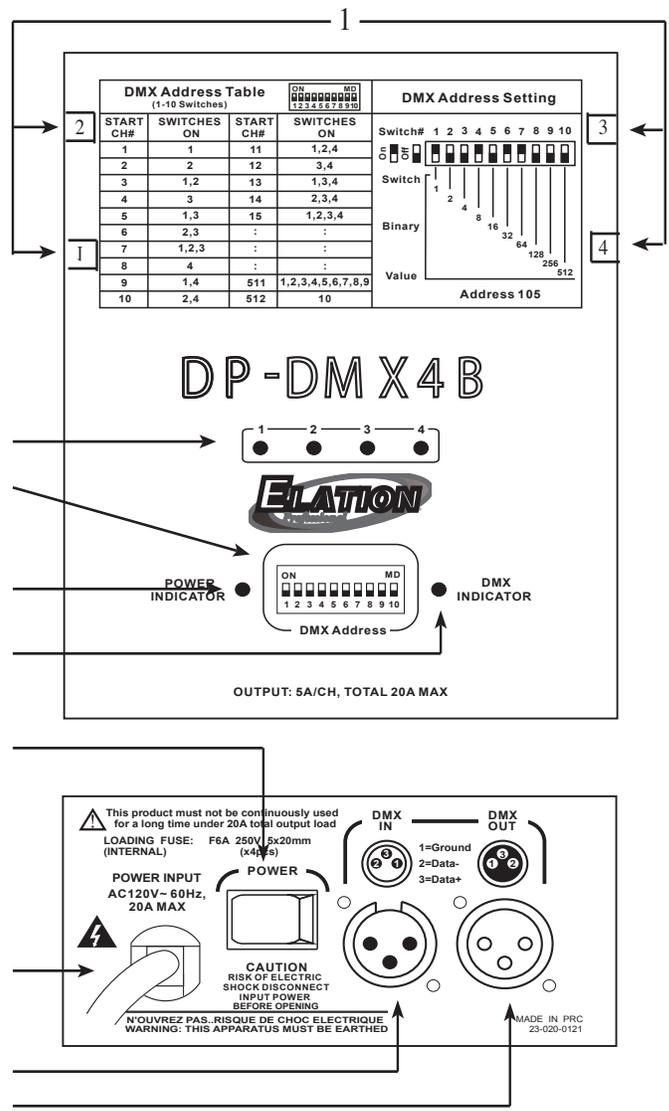

CAUTION! No user servicable parts inside. Do Not attempt repairs. In the event your unit should fail, contact Elation Professional® at (323) 582-3322.

WARNING! This product must be earthed. This product is intended for indoor use only. To prevent fire or shock hazard, do not expose this product to a high temperature or high humidity area.