



# Proteus Rayzor 1960



19x 60W RGBW LED IP65 Wash Fixture with SparkLED Effect, Zoom and Continuous Pan and Tilt

**DATA SHEET**



## KEY FEATURES

IP65 Rated LED Wash Effects Fixture

19x 60W OSRAM RGBW LED with Pixel Control

76x 2W SparkLED™ Effect with Pixel Control (patented)

Extreme Zoom – 5.6° for mid-air beam to 55° for even washes

Fast and precise 360° continuous Pan and Tilt rotation

Beam FX and Smooth Wash fixture in a compact IP65 certified housing

FIL (Foam In Lay) Polyurethane Foam Packaging Included

The **PROTEUS RAYZOR 1960™** is a compact yet extremely powerful IP65 rated Wash Effects fixture featuring Elation's unique SparkLED™ system and fast continuous Pan and Tilt motion. With its wide zoom range from 5° to 55° it provides intense and well-defined mid-air beams at over 18,000 lumens as well as an exceptionally wide and even wash coverage, making it a perfect tool for any application, even in adverse outdoor conditions. SparkLEDs offer a prominent and innovative LED pixel effect with dedicated high brightness pixels inside the large front lenses for additional layers of creativity.

Driven by 19, independently controlled, 60W RGBW LEDs, delivering over 18,000 lumens of output with a total power of 1140W, the **PROTEUS RAYZOR 1960™** provides a powerful beam that stands out on any stage. The oversized front lenses create a large surface on the fixture that is enhanced by the exclusive patent pending SparkLEDs technology. SparkLEDs consists of 76 individual white LEDs, strategically placed inside the lens itself to create a unique additional layer, allowing designers access to a new and innovative way of creating interest on the stage. Proteus Rayzor 1960 offers this never seen before style of internal lens illumination for depth and visual impact. SparkLEDs are controllable by the lighting console or driven by a multitude of internal FX patterns.

In addition to its powerful wash and enhanced effects, the **PROTEUS RAYZOR 1960™** offers precise continuous pan & tilt rotation, allowing variable speed from slow to extremely fast movement effects. Combining the powerful LED output with the SparkLEDs while utilizing the 360° movement, allows the designer to create endless, unique and appealing designs from mid-air beams or wide stage washes to subtle effects for mood or the TV camera lens.

The **PROTEUS RAYZOR 1960™** ships in a cardboard box with a custom fitted polyurethane foam FIL (Foam In Lay) insert. This foam insert easily fits into a custom sized flight case (not included), and provides enhanced impact protection during transport.





# Proteus Rayzor 1960



## SPECIFICATIONS

19x 60W RGBW LED IP65 Wash Fixture with SparkLED Effect, Zoom and Continuous Pan and Tilt

### SOURCE

(19) 60W Osram RGBW LEDs  
(76) 2W White SparkLED™  
50,000 Hour Average LED Life\*  
\*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

### PHOTOMETRIC DATA

18,100 Total Lumen Output  
CRI 80  
Zoom Range 5° - 55°  
Beam Angle 5.6° - 53.6°  
Field Angle 7.8° - 71°

### EFFECTS

Motorized Zoom  
Linear Color Temperature Presets (2700-8000K)  
RGBW Color Mixing and Pixel Control  
White SparkLED Lens Effect  
Color Presets and Macros  
Electronic Strobe and Variable Dimming Curves  
16-bit Dimming  
Pan Angle: 360° (continuous rotation) / 540°  
Tilt Angle: 360° (continuous rotation) / 270°

### CONTROL / CONNECTIONS

3 DMX Channel Modes (25 / 100 / 176 channels)  
360° Continuous Pan and Tilt Movement  
DMX Adjustable Refresh Rate (900 - 25000 Hz)  
(6) Button Touch Panel  
Full Color 180° Reversible LCD Menu Display  
RDM Support  
IP65 5pin XLR DMX In/Out  
IP65 RJ45 Ethernet In/Out (Art-Net, sACN)  
IP65 Locking Power Cable In  
SIZE / WEIGHT  
Length: 14.81 in (376.26mm)  
Width: 18.41 in (467.68mm)  
Height: 22.80 in (579.04mm)  
Weight: 73.0 lbs. (33.1kg)

### ELECTRICAL / THERMAL

AC 100-240V 50/60Hz  
1600W Max Power Consumption  
Ambient Temperature Range: -4°F to 113°F (-20°C to 45°C)

### APPROVALS / RATINGS

CE | cETLus | IP65 | UKCA






# Proteus Rayzor 1960



**PIXEL MAPPING**

19x 60W RGBW LED IP65 Wash Fixture with SparkLED Effect, Zoom and Continuous Pan and Tilt

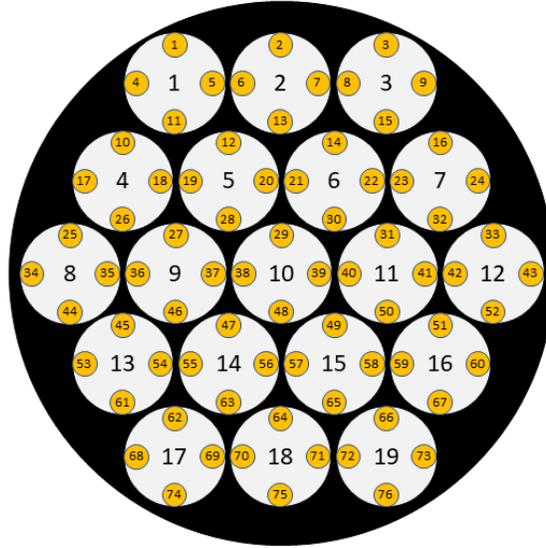

## ORDERING INFORMATION

US SKU	EU SKU	DESCRIPTION
PRR196	1237000261	Elation Proteus Rayzor 1960



Specifications are subject to change without notice ©Elation Professional 12/11/2023  
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu







# Proteus Rayzor 1960



19x 60W RGBW LED IP65 Wash Fixture with SparkLED Effect, Zoom and Continuous Pan and Tilt

## UNIT DIMENSIONS

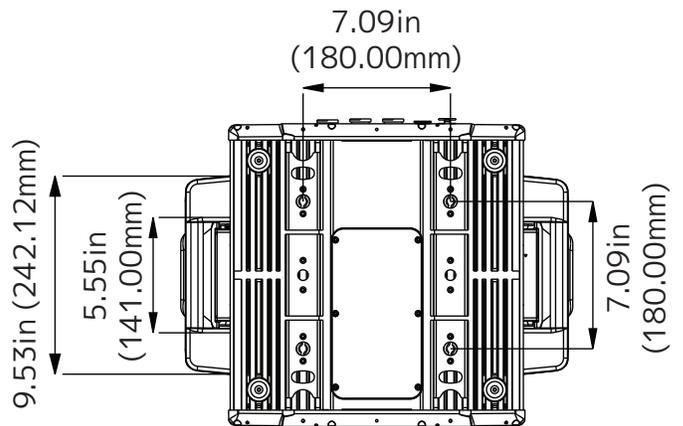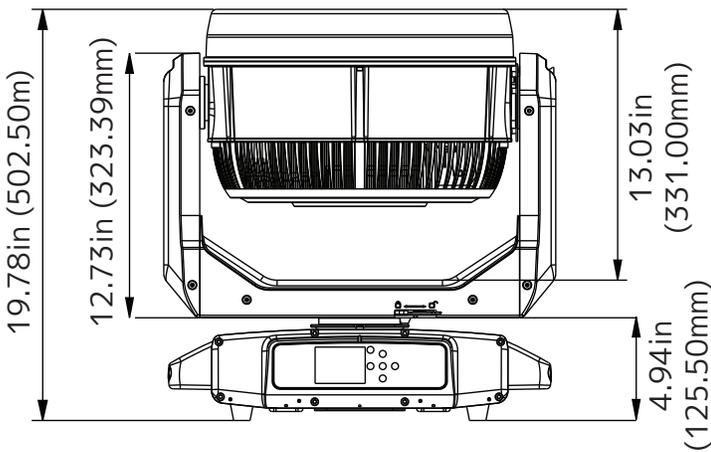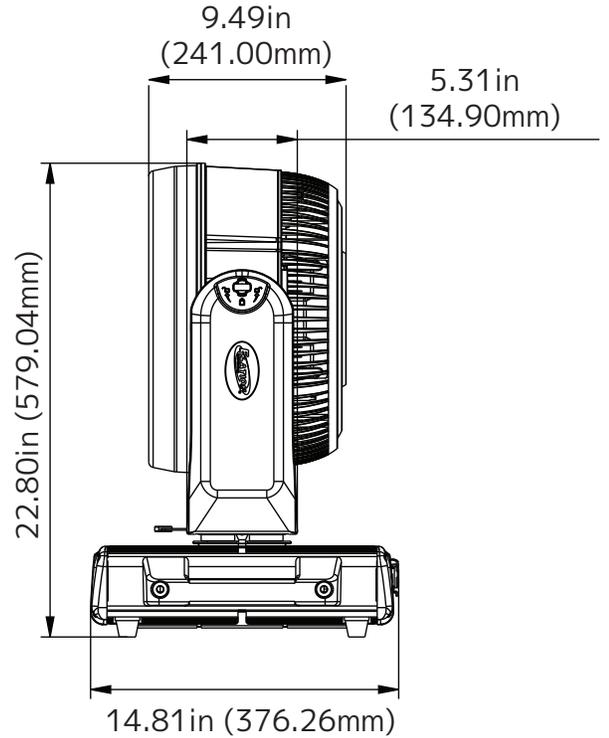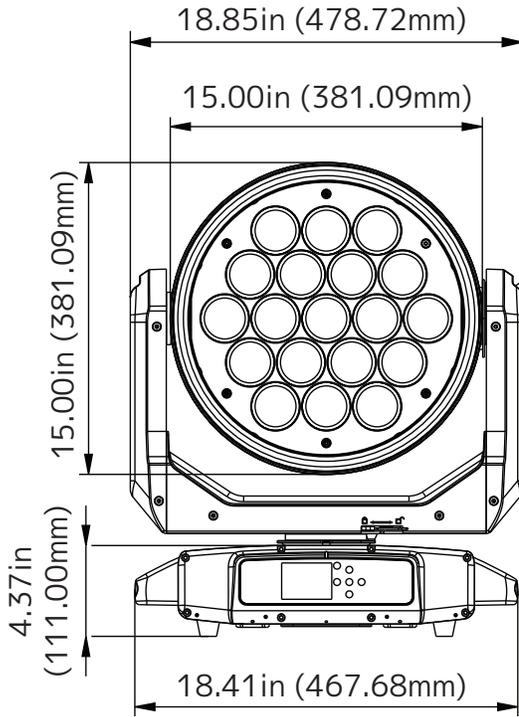



# Proteus Rayzor 1960



19x 60W RGBW LED IP65 Wash Fixture with SparkLED Effect, Zoom and Continuous Pan and Tilt

## FOAM IN-LAY DIMENSIONS

