



LIMELIGHT PAR S



7x 60W RGBL LED PAR with Zoom

DATA SHEET



KEY FEATURES

(7) 60W RGBL LED Array

5,345 Total Fixture Lumen Output (Sphere)

5°- 42° Beam Angle

Smooth 16-bit Selectable Dimming Modes and Curves

Remote LED Refresh Rate

Flicker Free Operation for TV and Film

7.5" Accessory Holder

IP65 Rated

Compact and vibrant, the **LIMELIGHT PAR S** features 7 × 60W RGBL LEDs, delivering up to 5,345 lumens of vivid color and high fidelity whites. Its 5°–42° motorized zoom and dual-zone control allow precise beam shaping—from tight spots to smooth washes. Rugged IP65 construction ensures it thrives in any environment, while CMY emulation, variable CCT, and gel-matched presets give designers the freedom to craft every shade and highlight exactly as they envision.





LIMELIGHT PAR S



7x 60W RGBL LED PAR with Zoom

SPECIFICATIONS

SOURCE

(7) 60W RGBL LEDs
30,000 Hour Average LED Life*
*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

Total Lumen Output
5,345 (Integrating Sphere)
4,844 (Goniometer)
CRI 82.8
TLCI 74
Zoom Range 5° - 42°
Beam Angle: 5° - 42°
Field Angle: 8° - 60°

EFFECTS

Dual Zone LED Control
Electronic Dimmer and Strobe
Variable 16-bit Dimming Modes and Curves

COLOR

RGBL Color Array
CMY Emulation
Variable CCT 2400K - 8500K
Virtual Gel Swatch Book

CONTROL / CONNECTIONS

7 DMX Channel Modes (4ch/12ch/15ch/13ch/
17ch/17ch/25ch)
Manual and DMX Controlled Dimmer and Color
4 Button Control Panel, LED Display
Aria x2 Wireless Device Management
RDM (Remote Device Management)
5pin DMX and IP65 Locking Power Cable In/Out

SIZE / WEIGHT

Length: 12.5" (317mm)
Width: 8.8" (224mm)
Vertical Height: 16.7" (423mm)
Weight: 20.1lbs. (9.1kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
332W Max Power Consumption
Power Thru Capacity: 11A (3 units @110V; 7
units @240V)
5°F to 113°F (-15°C to 45°C)
1132.8 BTU/hr (+/- 10%)

INCLUDED ITEMS

IP65 Locking Power Cable
Safety Cable

OPTIONAL ITEMS

7.5" Gel Frame
7.5" Barndoor (KLP959)
8050000053 - Omega Bracket

APPROVALS / RATINGS

CE | cETLus | IP65 | FCC | UKCA







LIMELIGHT PAR S



7x 60W RGBL LED PAR with Zoom

DIMENSIONS

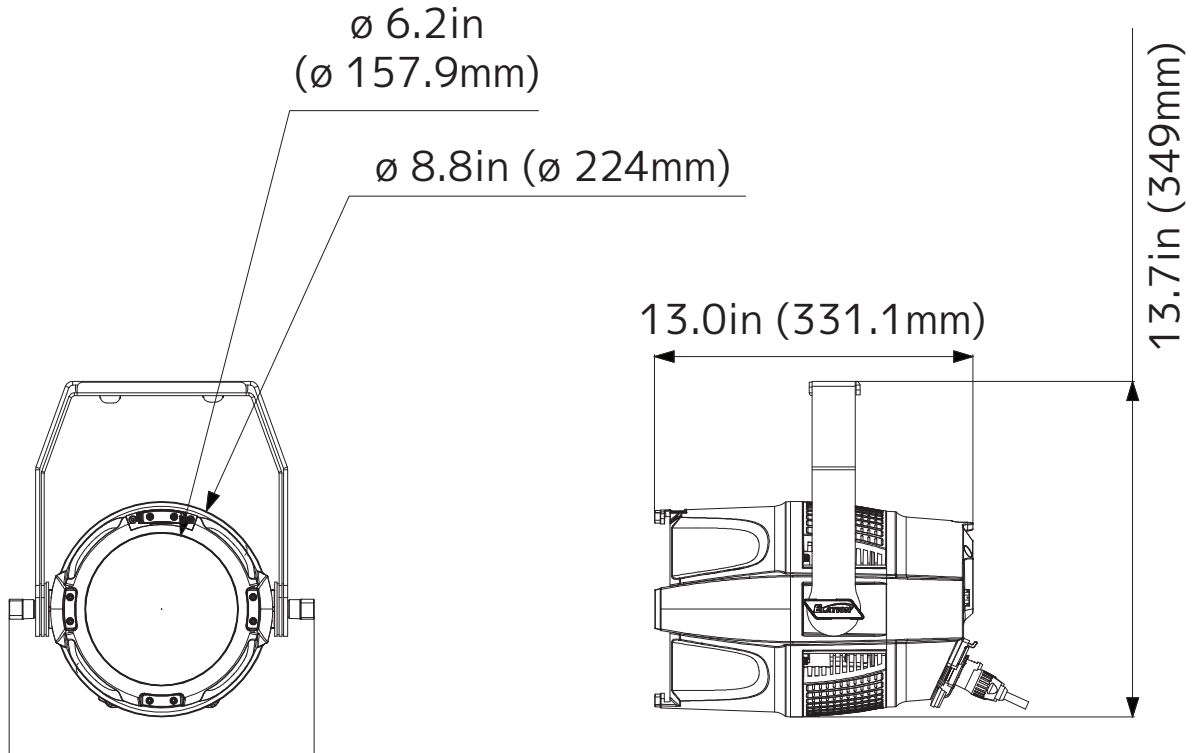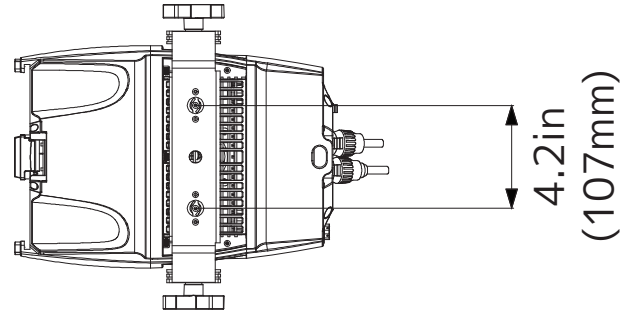

ORDERING INFORMATION

LLP301	1237000277	Limelight Par S
KLP959	1236100143	KL Par 7.5" Barndoor
PENDING	PENDING	7.5" Gel Frame
PENDING	PENDING	Omega Bracket

