

VISION SCAN 250

CONTROL FEATURES

RDMX - Remote DMX Addressing
USITT DMX-512 (16-bit resolution)
14 DMX channels
4 Digit L.E.D. Display
On board menu settings
3-pin XLR serial input/output
Sound active mode

NEW

OPTICAL SYSTEM

High output luminous-parabolic dichroic reflector
15° Beam Angle
All lenses are anti-reflection coated

COLORS

8 dichroic filters, 7 Colors, UV + White
Continuous, variable speed, color
scrolling in both directions
(rainbow effect)

More color combinations possible by overlaying
the multi-color dichroic gobo and the colors on the color wheel



GOBOS

2 gobo wheels, 13 total gobos, 10 metal, 3 glass with Slot-Lock gobo
replacement system
6 interchangeable, indexable, rotating gobos plus open
7 interchangeable, static gobos plus open
26.9mm outside diameter, 23mm image diameter
Gobo Overlay (Gobo Morphing)


SHUTTER/DIMMER

Variable speed strobe effect (1-10) Flashes per second
Pre-set variable/random strobe and dimming pulse effect
Dual Flag mechanical dimming system

PRISM

3 facet prism rotating in both directions at variable speeds
Macro-function for rotating gobos/rotating prism combinations

3 FACET PRISM



FOCUS

Motor driven focus from near to far

LAMP

Phillips MSD 250/2 (250W, 8500°K, 3000 HRS)



PAN/TILT

Maximum PAN-movement 170°
Maximum TILT-movement 85°
Vector Mode with blackout

RIGGING

1 x Heavy Duty yoke
1 x Safety cable hole

POWER SUPPLY

8A or 4A Fuse
Magnetic Ballast
Voltage: AC 98, 120, 208, 220, 230, 240V 50/60Hz
Power Consumption 400W

DIMENSIONS & WEIGHT


15"L x 14"W x 29.25"H
48.5 lbs.



CARRYING HANDLE



RDMX
REMOTE DMX ADDRESSING

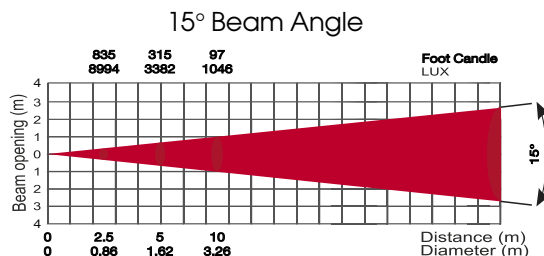

GOBO WHEEL 1

Rotating Gobo Wheel



GOBO WHEEL 2

Convenient Slot-Lock gobo replacement system

