


ELED Par RGB Zoom
Photometric Beam Angle Data

10° Minimum Beam Angle

LUX x 0.0929 = FC

R (8)	225 FC / 2,420 LUX	71 FC / 760 LUX	32 FC / 348 LUX	18 FC / 196 LUX	11 FC / 116 LUX
G (8)	321 FC / 3,450 LUX	118 FC / 1,270 LUX	564 FC / 564 LUX	33 FC / 357 LUX	20 FC / 210 LUX
B (8)	231 FC / 2,490 LUX	153 FC / 1,650 LUX	74 FC / 797 LUX	42 FC / 451 LUX	28 FC / 298 LUX
All (24)	711 FC / 7,650 LUX	315 FC / 3,390 LUX	126 FC / 1,360 LUX	85 FC / 920 LUX	61 FC / 655 LUX

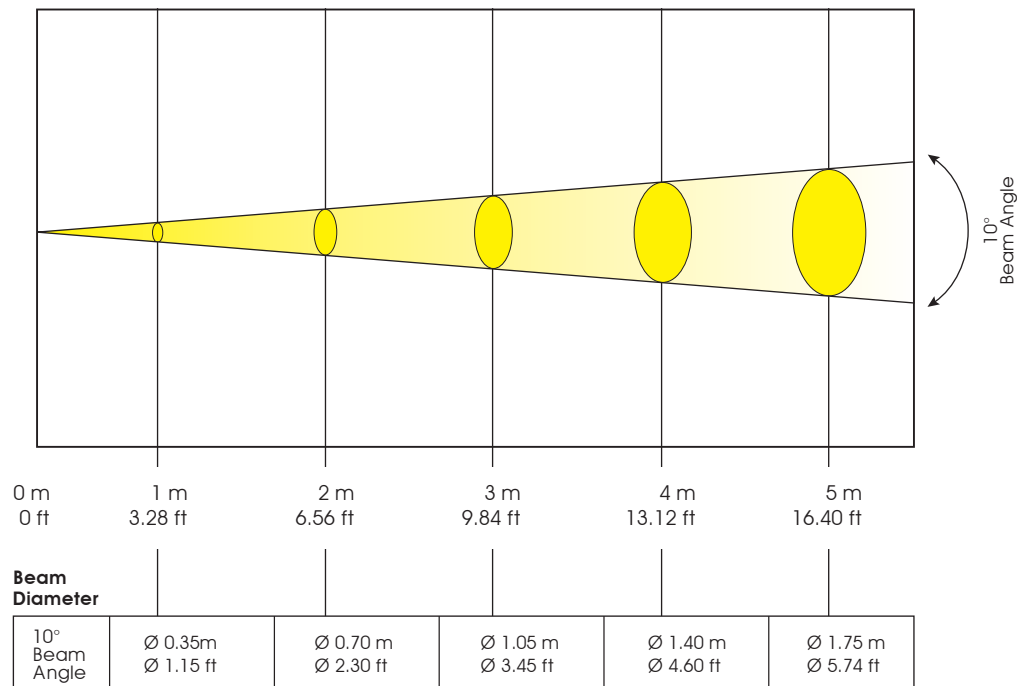

60° Maximum Beam Angle

LUX x 0.0929 = FC

R (8)	25 FC / 272 LUX	6 FC / 64 LUX	2 FC / 26 LUX	1 FC / 14 LUX	0.90 FC / 9.5 LUX
G (8)	40 FC / 431 LUX	11 FC / 114 LUX	4 FC / 47 LUX	2 FC / 26 LUX	1.6 FC / 17 LUX
B (8)	35 FC / 382 LUX	10 FC / 110 LUX	4 FC / 45 LUX	3 FC / 27 LUX	16 FC / 16 LUX
All (24)	113 FC / 1,220 LUX	28 FC / 301 LUX	11 FC / 119 LUX	6 FC / 65 LUX	4 FC / 45 LUX

