


Opti RGB
Photometric Beam Angle Data

Standard Beam Angle 15°

LUX × 0.0929 = FC

R (8)	111 FC / 1194 LUX	3.7 FC / 39.8 LUX	1.6 FC / 17.5 LUX	0.9 FC / 10.1 LUX	0.8 FC / 8.6 LUX
G (8)	126 FC / 1358 LUX	3.9 FC / 42.5 LUX	2.4 FC / 25.7 LUX	1.4 FC / 14.6 LUX	0.9 FC / 9.5 LUX
B (8)	13 FC / 136.4 LUX	0.3 FC / 3.7 LUX	0.2 FC / 2.5 LUX	0.2 FC / 1.7 LUX	0.1 FC / 1.2 LUX
RGB (24)	217 FC / 2340 LUX	18 FC / 192 LUX	4.7 FC / 50.2 LUX	1.8 FC / 19.7 LUX	1.5 FC / 15.8 LUX

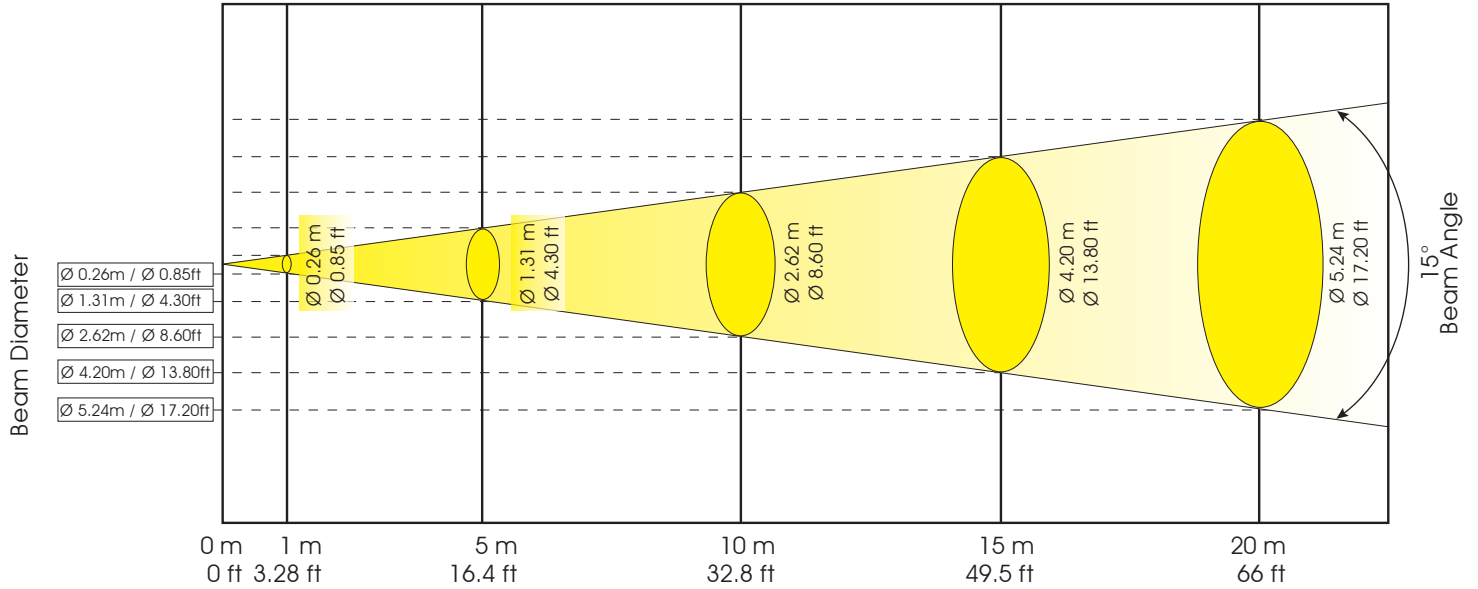

Optional Beam Angle 45° (not included)

LUX × 0.0929 = FC

R (8)	15.5 FC / 124 LUX	0.5 FC / 5.6 LUX	0.3 FC / 2.9 LUX	0.2 FC / 1.9 LUX	0.1 FC / 1.6 LUX
G (8)	18.2 FC / 196 LUX	0.6 FC / 6.4 LUX	0.4 FC / 3.8 LUX	0.2 FC / 2.3 LUX	0.2 FC / 1.9 LUX
B (8)	1.4 FC / 14.6 LUX	0.1 FC / 1.6 LUX	0.1 FC / 1.3 LUX	0.09 FC / 1 LUX	0.1 FC / 0.7 LUX
RGB (24)	33.1 FC / 356 LUX	1.7 FC / 18.1 LUX	0.5 FC / 5.4 LUX	0.3 FC / 2.9 LUX	0.2 FC / 2.4 LUX

